


Nathan (2017)  
use on own risk

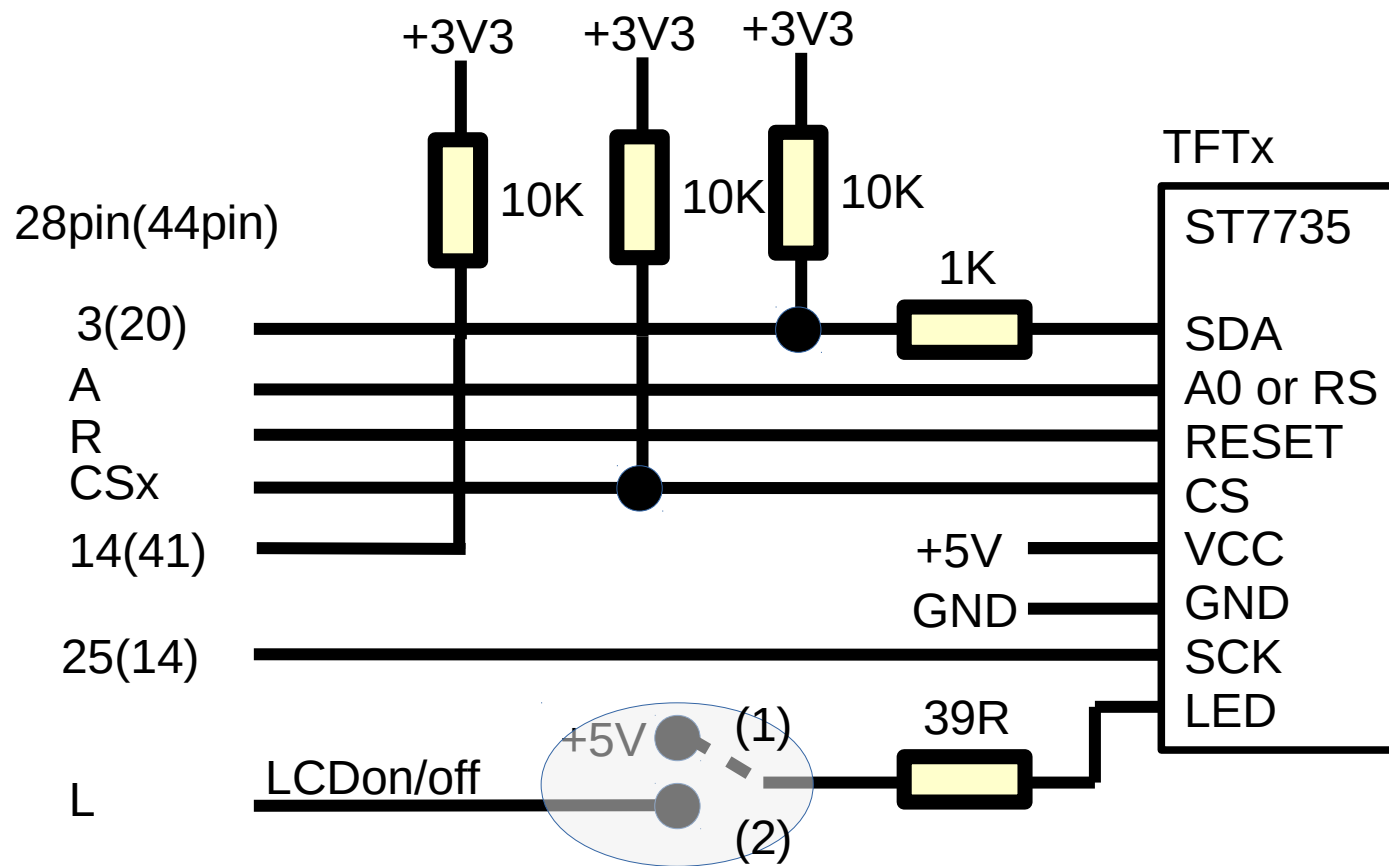

Some TFT displays have a transistor at the LCD pin.  
In that case the lcd backlight can be controlled by a  
PIN() or PWM output (bridge position 2).

A, R, CSx are configurable by the driver  
(L is under user control).

**The 1K resistor is required to avoid hardware damage  
of the TFT display (it's a MUST).**

Nathan (2017)  
Dual display

